

App. Note Code: 2Q-S
Written by John Downing

APPLICATION NOTE

Effects of Suspended Solid Concentrations (SSC) on OBS[®] Measurements



CAMPBELL SCIENTIFIC, INC.[®]
WHEN MEASUREMENTS MATTER

Copyright (C) April 2008 Campbell Scientific, Inc.

Effects of Suspended Solids Concentrations (SSC) on OBS[®] Measurements

This application note discusses the effects of sediment concentrations on OBS[®] measurements.

Of all the factors that influence the signal output of a light-scattering sensor, suspended solids concentrations (SSC) has the largest effect. The concentration of suspended sediment over time and from place to place can easily change by a factor of 1000. In large rivers for example, it is not unusual for SSC to vary from several mg l^{-1} to several thousand mg l^{-1} . The most linear response to such changes in SSC is obtained with a backscatter-measuring sensor such as our OBS-3+ and OBS-5+. Most other designs cannot respond to them. Figure 1 shows the effects for various types of sediment.

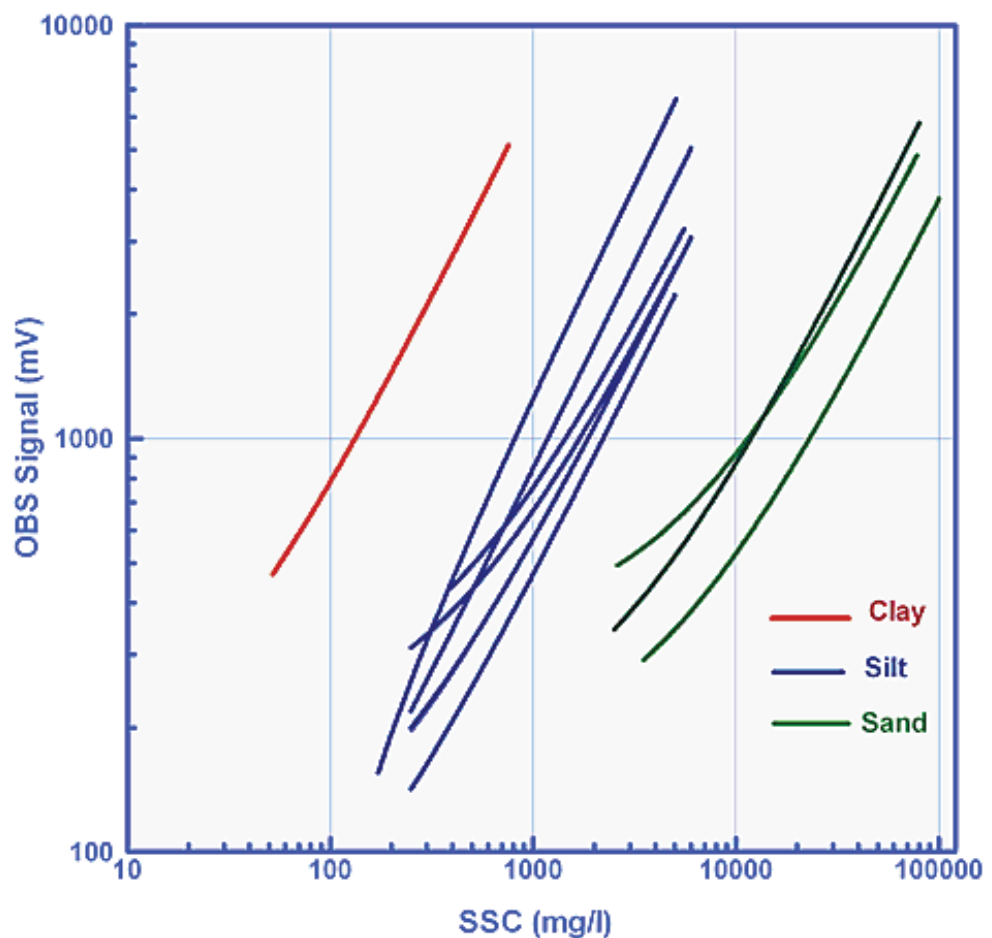


Figure 1. Graph shows the sample calibrations for sand, silt, and clay.

Reference

Kineke, G.C & R.W. Sternberg. 1992. Measurements of High Concentration Suspended Sediments Using the Optical Backscatterance Sensor. *Marine Geology*. Vol.108, pp. 253-258.

Schoellhamer, D. & Scott Wright. 2003. Continuous Measurement of Suspended-Sediment Discharge in Rivers by Use of Optical Backscatterance Sensors. *Technological & Methodological Advances, International Association of Hydrologic Sciences, IAHS Pub. 283, Oslo, Norway.* pp. 28-38.

Butt T., J. Miles, P. Ganderton & P. Russell. 2002. A Simple Method for Calibrating Optical Backscatter Sensors in High Concentrations of Non-Cohesive Sediments. *Marine Geology*. Vol. 192 (4) pp. 419-424.

Bunt, J.A.C., P. Larcombe & C. F. Jacob. 1999. Quantifying the Response of Optical Backscatter Devices & Transmissometers to Variations in Suspended Particulate Matter. *Continental Shelf Research*. Vol. 19 (9) pp. 1199-1220.