


RF323

UHF Radio Transceiver Covering 450 to 470 MHz Range

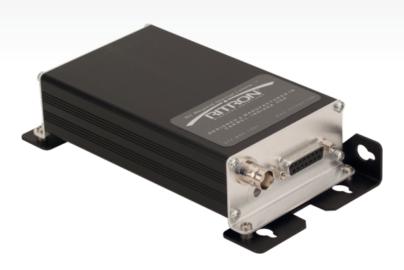

Rugged, Long Range

Long-distance option for communication

Overview

The RF323 is a 450 to 470 MHz radio. Campbell Scientific's RF320-series narrowband UHF/VHF radio transceivers provide a long-distance telemetry option for communicating with remote measurement stations. Each radio includes a

configured Ritron DTX-L radio, a mounting bracket, and a cable for connecting the radio to a radio modem. The different models vary by the frequency ranges they support.

Detailed Description

The RF323 is programmed by Campbell Scientific to the frequency that was assigned by the Federal Communications Commission (FCC). This frequency must be specified at time of order so that it can be programmed into the radio.

A user-supplied antenna is required for each radio; contact Campbell Scientific for more information about selecting the antenna and cable. Each radio must also be connected to an RE500M or RE310M radio modem.

Specifications

DTX-445
AIERIT17-445
1084A-RIT17445
90
RSS-119
450 to 470 MHz
8 independent Tx/Rx frequencies
6.25 kHz
12.5 kHz
±1.5 PPM (-30° to +60°C)

Input Voltage	9 to 17 Vdc
Antenna Connector	BNC female
Dimensions	14.5 x 7.6 x 3.5 cm (5.7 x 3 x 1.375 in.)
Weight	0.2 kg (7.3 oz)

Current Drain @ 12.5 Vdc		
Receive Standby	25 mA	
Transmitter	< 1.2 A (5 W output)< 0.9 A (2 W output)	

Receiver	
Receiver Type	12.5 kHz narrowband
Sensitivity	0.25 μV (12 dB SINAD)
Adjacent Channel	-60 dB
Receiver Attack Time	< 10 ms (Tx to Rx)
Noise Squelch Sensitivity	PC adjustable (factory set for -121 dBm)

Transmitter	
RF Power Output	2.0 W or 5.0 W (@ 12.5 Vdc)
Duty Cycle	50% (< 13.5 V, 5 W output, 25°C)
Voice Emissions Designator	10K0F3E
Data Emissions Designator	9K8F1D, 11K0F2D, 11K0F3D
Transmitter Attack Time	< 10 ms

